




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B65G 69/20</b>		A1	(11) International Publication Number: <b>WO 00/00418</b>
			(43) International Publication Date: 6 January 2000 (06.01.00)
(21) International Application Number: PCT/IB99/01199 (22) International Filing Date: 25 June 1999 (25.06.99) (30) Priority Data: 98/5615                      26 June 1998 (26.06.98)                      ZA (71) Applicant (for all designated States except US): RUSSEL-SMITH, Beverley, May [ZA/ZA]; 1 Delft Street, Die Heuwel, 1035 Witbank (ZA). (72) Inventor; and (75) Inventor/Applicant (for US only): RUSSEL-SMITH, Kevan, Vaughan [ZA/ZA]; 1 Delft Street, Die Heuwel, 1035 Witbank (ZA). (74) Agent: VAN DER WALT, Louis; Adams & Adams Pretoria Office, Adams & Adams Place, 1140 Prospect Street, Hatfield, 0001 Pretoria (ZA).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: DENSIFYING OF A BULK PARTICULATE MATERIAL

## (57) Abstract

A method of densifying a bulk particulate material includes at least partially confining the bulk particulate material, and rotating a rotatable member (14) submerged under the bulk particulate material about an axis of rotation (16) to cause movement of the material particles essentially towards or away from the axis of rotation, thereby to provide a densified bulk particulate material. The method is particularly suitable for densifying silica fume. The invention extends to apparatus for densifying a bulk particulate material.

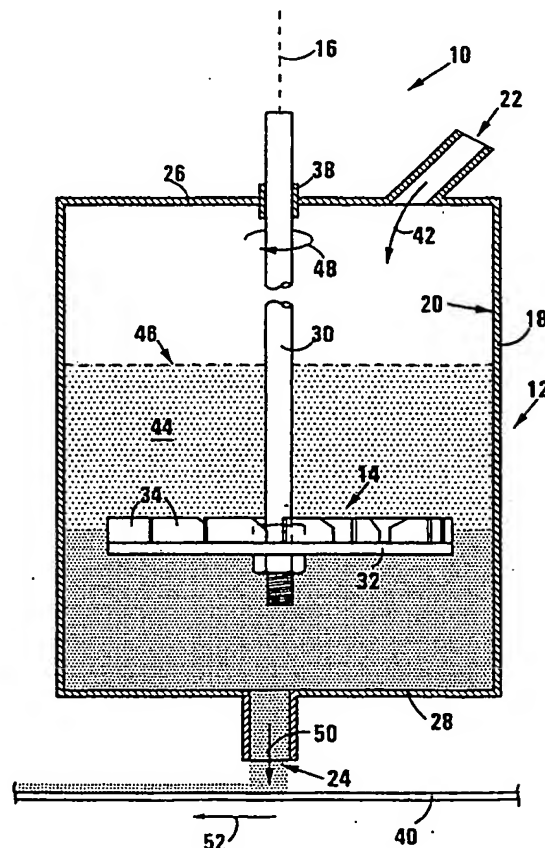

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PC

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

DENSIFYING OF A BULK PARTICULATE MATERIAL

THIS INVENTION relates to densifying of a bulk particulate material. In particular, it relates to a method and to apparatus for densifying a bulk particulate material.

5           According to a first aspect of the invention, there is provided a method of densifying a bulk particulate material, the method including  
at least partially confining the bulk particulate material; and  
rotating a rotatable member submerged under the bulk particulate material  
about an axis of rotation to cause movement of the material particles essentially  
10 towards or away from the axis of rotation, thereby to provide a densified bulk  
particulate material.

Thus, at least on initial contact of the material particles with the rotatable member, the particles move generally towards or away from the axis of rotation.

15           Confining the bulk particulate material may include feeding the bulk particulate material into a vessel. Typically, the vessel has a wall defining a circular cylindrical interior surface. The vessel may have a central, longitudinal axis which is coaxial with the axis of rotation of the rotatable member.

20           The method may include vibrating the vessel to inhibit agglomeration or build-up or caking of the particulate material against interior surfaces of the vessel.

The method may include discharging the densified bulk particulate material from the vessel. It is to be appreciated that the method can be conducted on a continuous basis or on a batch basis, discharging of the densified bulk particulate material from the vessel and feeding of bulk particulate material into the vessel thus occurring batch-wise, or on a controlled basis. Thus, the bulk particulate material may be fed on a continuous basis into the vessel, and the densified bulk particulate material may be discharged on a continuous basis from the vessel.

The method may include measuring or determining the bulk density of the densified bulk particulate material prior to discharging it from the vessel. Instead, the method may include measuring or determining the bulk density of the densified bulk particulate material after it has been discharged from the vessel.

The method may include controlling the density of the densified bulk particulate material. The controlling of the density of the densified bulk particulate material may be effected by a method selected from the group consisting of manipulating the residence time of the bulk particulate material in the vessel, manipulating the angular speed of rotation of the rotatable member, manipulating the level of the bulk particulate material in the vessel, or two or more of these methods. The controlling of the density of the densified bulk particulate material is however not necessarily limited to these methods.

The axis of rotation of the rotatable member may be substantially vertical. Preferably, the rotatable member causes movement of the material particles inwardly towards the vertical axis of rotation. In another embodiment of the invention, the coaxial axis of rotation and longitudinal axis of the vessel are at an angle of about 60° to the horizontal.

The rotatable member may be rotated at an angular speed of between 100rpm and 3500rpm. Preferably, the rotatable member is rotated at

an angular speed of between 500rpm and 1000rpm. Typically, the rotatable member is rotated at an angular speed of between 700rpm and 800rpm, e.g. about 732rpm.

5 The bulk particulate material may have a mean particle size of less than 1mm. Typically, the bulk particulate material has a mean particle size of less than 0,5mm, even less than  $1\mu\text{m}$ , e.g. about  $0,15\mu\text{m}$ .

The method may include extracting dust from the vessel.

10 The bulk particulate material may be particulate silica having a particle size of the less than  $0,5\mu\text{m}$ , typically less than  $0,2\mu\text{m}$ . Indeed, it is expected that the invention will find particular, though not necessarily exclusive application in densifying so-called silica fume.

15 The ratio of the density of the silica prior to densifying thereof, to the density of the densified silica may be at least than 2:3. Preferably, the ratio of the density of the silica prior to densifying thereof, to the density of the densified silica is at least 1:2, depending on the density of the silica prior to densifying. The ratio can be as large as 1:3, or even larger, depending on the density of the silica prior to densifying.

20 According to a second aspect of the invention, there is provided apparatus for densifying a bulk particulate material, the apparatus including a vessel for at least partially confining a body of the bulk particulate material;

25 a rotatable member which is arranged such that in use it is submerged in the body of bulk particulate material and causes movement of the material particles essentially towards or away from an axis of rotation when the rotatable member is rotated about the axis of rotation; and

drive means connected to the rotatable member and capable of rotating the rotatable member when it is submerged in the body of bulk particulate material.

The vessel may have an outlet for densified bulk particulate material at a low elevation, and an inlet for bulk particulate material at a higher elevation than the outlet. The rotatable member may be located between the inlet and the outlet of the vessel. Preferably, the rotatable member is located at the elevation of the outlet of the vessel.

The drive means may be capable of rotating the rotatable member at an angular speed of between 100rpm and 3500rpm when the rotatable member is submerged in the body of particulate material. Typically, the drive means is capable of rotating the rotatable member at an angular speed of between 500rpm and 1000rpm when the rotatable member is submerged in the body of particulate material, e.g. at about 700rpm to 800rpm.

The rotatable member may include a plurality of circumferentially spaced vanes. The vanes may be directed or arranged in use to displace the bulk particulate material generally radially relative to the axis of rotation of the rotatable member. Preferably, the vanes are directed or arranged so that the movement of the material particles is inwardly towards the axis of rotation when the rotatable member is rotated, at least on initial contact of the material particles with the rotatable member.

The rotatable member may include a disk-shaped body from which the vanes project. The vanes may project from a surface of the disk-shaped body which is an upper surface in use. Instead, the vanes may project radially outwardly from a periphery of the disk-shaped body.

The vanes may be planar and may be substantially tangential to a drive shaft connecting the drive means to the rotatable member. A radially inner end portion of each vane may be truncated so that the radially inner end of the vane forms an angle of between  $15^{\circ}$  and  $60^{\circ}$  with the axis of rotation in the plane of the vane. Preferably, the angle is between  $20^{\circ}$  and  $50^{\circ}$ , e.g. about  $30^{\circ}$ .

The vessel may have a wall defining a circular cylindrical interior surface, and a central, longitudinal axis which may be coaxial with the axis of rotation of the rotatable member. The ratio of the diameter of a circle described by the rotatable member when it rotates, to the diameter of the vessel may be between 0,25:1 and 0,99:1. Preferably, the ratio is between 0,5:1 and 0,99:1. Typically, the ratio of the diameter of the circle described by the rotatable member when it rotates, to the diameter of the vessel is between 0,9:1 and 0,99:1, e.g. about 0,95:1.

The vessel may have a volume of between  $0,1\text{m}^3$  and  $200\text{m}^3$ . Typically, the vessel has a volume of between  $0,1\text{m}^3$  and  $0,5\text{m}^3$ .

The axis of rotation of the rotatable member may be substantially vertical.

The apparatus may include conveying means and bagging means, the conveying means being arranged to convey densified bulk particulate material from the vessel to the bagging means for bagging the densified bulk particulate material.

The apparatus may include vibration means for vibrating the vessel to inhibit agglomeration or caking or build-up of the particulate material against interior surfaces of the vessel.

The apparatus may include dust extraction means for extracting dust from the vessel.

The rotatable member and interior surfaces of the vessel may be coated with a material which inhibits caking or agglomeration or build-up of the bulk particulate material against or on them.

The apparatus may include density measurement means and control means for controlling the bulk density of the densified bulk particulate material.

The invention will now be described, by way of example, with reference to the accompanying diagrammatic drawings and examples.

5 In the drawings

Figure 1 shows a sectioned elevational view of one embodiment of apparatus in accordance with the invention for densifying a bulk particulate material;

10 Figure 2 shows a three-dimensional view of a rotatable member of the apparatus of Figure 1;

Figure 3 shows a sectioned elevational view of another embodiment of apparatus in accordance with the invention for densifying a bulk particulate material; and

15 Figure 4 shows a three-dimensional view of a rotatable member of the apparatus of Figure 3.

Referring to Figure 1 of the drawings, reference numeral 10 generally indicates one embodiment of an apparatus in accordance with the invention for densifying a bulk particulate material. The apparatus 10 includes a vessel 12 for containing and confining the bulk particulate material, and a  
20 rotatable member 14 which is in use submerged in the bulk particulate material contained in the vessel 12, and which is rotatable about a vertical axis of rotation 16.

The vessel 12 includes a circular cylindrical wall 18 which defines a circular cylindrical interior surface 20 of the vessel 12. Thus, the vessel 12  
25 has a central, longitudinal vertical axis which corresponds or which is coaxial with the axis of rotation 16. In another embodiment of the invention, the axis of the vessel and the axis of rotation may be angularly disposed relative to the horizon, e.g. at an angle of about 60°.

The vessel 12 includes an inlet 22 for the bulk particulate material, and an outlet 24 for densified bulk particulate material. The inlet 22 is located in a roof 26 of the vessel 12, and the outlet 24 is located in a floor 28 of the vessel 12.

5           The rotatable member 14 is located between the inlet 22 and the outlet 24. The rotatable member 14 is mechanically attached to a drive shaft 30, which is in turn drivenly connected to an electric motor (not shown). The electric motor is capable of selectively rotating the rotatable member 14 at an angular speed of between 2600 and 3000rpm.

10           The rotatable member 14 includes a disklike body 32 from which a plurality of circumferentially spaced planar vanes 34 projects. The vanes 34 are directed or arranged in use to displace the bulk particulate material contained in the vessel 12 inwardly towards the axis of rotation 16. The vanes 34 project from a surface 36 of the disklike body 32 which is an upper surface in use.

15           The disklike body 32, and thus the rotatable member 14, has a diameter of 720mm. The vessel 12 has an internal diameter of about 800mm. Thus, a ratio of the diameter of the rotatable member 14 : the diameter of the vessel 12 is 0,9:1.

20           The drive shaft 30 extends through the roof 26 of the vessel 12. A seal 38 is provided between the drive shaft 30 and the roof 26.

A conveyor belt 40 is provided underneath the outlet 24.

A dust extraction outlet (not shown) is provided for the vessel 12, and a vibrator (not shown) is mounted against the exterior surface of the wall 18.

In use, the vessel 12 is fed on a controlled basis with bulk particulate material 44, as shown by arrow 42, to maintain a level 46 of the bulk particulate material in the vessel 12 sufficient to cover the rotatable member 14.

5 The submerged rotatable member 14 is rotated at an angular speed of about 2900rpm, in the direction of arrow 48, by means of the electric motor and the drive shaft 30. The vanes 34 displace the particles of the bulk particulate material inwardly towards to the axis of rotation 16 and densifies the bulk particulate material. The vibrator is run to inhibit caking of the bulk particulate material against interior surfaces of the vessel 12, and dust which is  
10 formed is extracted through the dust extraction outlet.

The densified bulk particulate material is discharged through the outlet 24 as shown by arrow 50 on to the conveyor belt 40, which moves in the direction of arrow 52. The density of the densified bulk particulate material on the conveyor belt 40 is measured by density measurement and control means  
15 (not shown), which increases or decreases the discharge rate of the densified bulk particulate material from the vessel 12, thereby increasing or decreasing the residence time of the bulk particulate material in the vessel 12, in order to densify the bulk particulate material to a desired bulk density.

20 Referring to Figure 3 of the drawings, another embodiment of apparatus in accordance with the invention for densifying a bulk particulate material is generally indicated by reference numeral 100. The apparatus 100 is similar to the apparatus 10, and unless otherwise indicated, the same reference numerals used in relation to the apparatus 10, are used to indicate the same or similar parts or features of the apparatus 100.

25 The apparatus 100 includes a rotatable member 102, which is more clearly illustrated in Figure 4 of the drawings. As can be seen in Figure 4, the vanes 34 are vertical and planar, and are substantially tangential to the drive shaft 30 (not shown) in Figure 4, which is operatively connected to the rotatable

member 102. An inner end portion of each vane 34 is truncated so that the radially inner end 35 of each vane 34 forms an angle of about  $30^\circ$  with the axis of rotation of the rotatable member 34, in the plane of the vane 34.

5 The rotatable member 102 is located at the elevation of the outlet 24 of the vessel 12. The outlet 24 is provided in a lower portion of the wall 18 of the vessel 12. A manually operated outlet cover 104 is provided to control the rate of release of densified bulk particulate material from the vessel 12 in use.

10 The drive shaft 30 is rotatably mounted to a support member 31 by means of two plummer blocks 33 and is operatively connected to an electric motor 106, by means of a drive belt 108 and two pulleys 110, 112. The arrangement of the motor 106 and the pulleys 110, 112 is such that, in use, the motor 106 is capable of rotating the rotatable member 102 at an average speed of between 700rpm and 800rpm.

15 The vessel 12 and motor 106 are mounted on a support structure 114.

20 The vessel 12 has an internal diameter of about 576mm, and a height of about 1500mm. The rotatable member 102 has a diameter of about 550mm. Thus, the ratio of the diameter of the rotatable member 102 to the diameter of the vessel 12 is about 0,95:1.

25 The apparatus 100 is used in similar fashion to the apparatus 10 to densify bulk particulate material. Thus, bulk particulate material is fed into the vessel 12 through the inlet 22 to maintain a level of the bulk particulate material in the vessel 12 sufficient to cover the rotatable member 102, and the rotatable member 102 is rotated at an angular speed of about 732rpm by means of the electric motor 106 and drive shaft 30. The vanes 34 displace the material particles inwardly towards the axis of rotation of the rotatable member 102 and

densifies the bulk particulate material. The densified bulk particulate material is discharged periodically through the outlet 24 onto the conveyor belt 40 by means of a shoot 116. The conveyor 40 conveys the densified bulk particulate material to a bagging plant (not shown), which bags the densified bulk particulate material.

### EXAMPLE 1

1000g of an undensified or raw silica fume at room temperature was placed in a laboratory scale cylindrical container having an internal diameter of about 155mm and a height of about 300mm. The undensified silica fume had the following composition:

	<u>% (w/w dry basis)</u>
Fe <sub>2</sub> O <sub>3</sub>	0,15
CaO	0,20
Al <sub>2</sub> O <sub>3</sub>	0,15
15 MgO	0,40
Na <sub>2</sub> O	0,15
K <sub>2</sub> O	0,50
MnO	0,02
TiO <sub>2</sub>	0,06
20 P <sub>2</sub> O <sub>5</sub>	0,10
C	5,0
S	0,25
Ni	0,03
Zn	0,03
25 Pb	0,003
Cu	0,002
Co	0,002
SiO <sub>2</sub>	92,953%

The pH (5g/100ml distilled water) of the undensified silica fume was between 6,5 and 7,8, it had a moisture content of about 0,4% and a mean particle diameter of about  $0,15\mu\text{m}$ . The bulk density of the undensified silica fume was about  $281,7\text{kg/m}^3$ .

5 A rotatable member as shown in Figure 2 of the drawings, and having a diameter of about 135mm, was submerged in the silica fume in the container, and was rotated at an angular speed of about 3000rpm for a period of about 150 seconds to densify the silica fume. The densified silica fume was removed from the container, and its density was determined. It was found that  
10 the densified silica fume had a density of about  $623,7\text{kg/m}^3$  and a temperature of  $69^\circ\text{C}$ .

#### EXAMPLE 2

The apparatus 100 was used to densify silica fume of unknown composition. Sixteen runs were conducted, and the results are summarised in  
15 the following table. For each run, the rotatable member 102 was rotated at an angular speed of 732rpm and was ramped up to speed within about 3 seconds, and again stopped, after completion of the run, in about 3 seconds.

Density of raw silica fume (kg/m <sup>3</sup> )	244.5	244.5	248.1	225.2	232.4	222	232.4	231.4
Initial temperature of silica fume (°C)	40	51	53	50	52	34	34	36
Weight of silica fume (kg)	33.3	55.5	38.7	40.5	41.1	40.2	41.8	39.9
Density of densified silica fume (kg/m <sup>3</sup> )	659.3	713.9	590.2	643.7	632.2	620.8	599	652.1
Temperature of densified silica fume (°C)	110	140	90	110	110	72	80	80
Densification time (minutes)	5	5	2	3	3	3	3	3
Ratio of density of raw silica fume to density of densified silica fume	1:2.7	1:2.8	1:2.4	1:2.9	1:2.7	1:2.8	1:2.6	1:2.8

Density of raw silica fume (kg/m <sup>3</sup> )	239.3	242	237.3	246.9	232.2	232.2	234.1	240
Initial temperature of silica fume (°C)	36	38	43	51	34	36	36	38
Weight of silica fume (kg)	41.9	41.7	39.8	42.1	43.4	43.3	40.1	41.8
Density of densified silica fume (kg/m <sup>3</sup> )	644.2	638.5	592.3	655.2	628.8	642.9	630.1	650
Temperature of densified silica fume (°C)	83	60	105	105	80	80	83	60
Densification time (minutes)	3	3	1.5	3.5	3	3	3	3
Ratio of density of raw silica fume to density of densified silica fume	1:2.7	1:2.6	1:2.5	1:2.7	1:2.7	1:2.8	1:2.7	1:2.7

It is an advantage of the invention, as illustrated, that it provides a cost effective method and apparatus for densifying a bulk particulate material, such as silica fume. It is a further advantage of the invention, as illustrated, that the method and apparatus are capable of densifying a silica fume to a higher bulk density than conventional methods and apparatus used for the densifying of silica fume.

CLAIMS

1. A method of densifying a bulk particulate material, the method including at least partially confining the bulk particulate material; and

5 rotating a rotatable member submerged under the bulk particulate material about an axis of rotation to cause movement of the material particles essentially towards or away from the axis of rotation, thereby to provide a densified bulk particulate material.

10 2. A method as claimed in claim 1, in which confining the bulk particulate material includes feeding the bulk particulate material into a vessel.

15 3. A method as claimed in claim 2, in which the vessel has a wall defining a circular cylindrical interior surface, the vessel having a central, longitudinal axis which is coaxial with the axis of rotation of the rotatable member.

20 4. A method as claimed in claim 2 or claim 3, which includes vibrating the vessel to inhibit agglomeration or build-up or caking of the particulate material against interior surfaces of the vessel.

25 5. A method as claimed in any one of claims 2 to 4 inclusive, in which the bulk particulate material is fed on a continuous basis into the vessel, and which includes discharging the densified bulk particulate material on a continuous basis from the vessel.

30 6. A method as claimed in any one of claims 2 to 5 inclusive, which includes controlling the density of the densified bulk particulate material, the controlling of the density of the densified bulk particulate material being effected by a method selected from the group consisting of manipulating the residence time of the bulk particulate material in the vessel, manipulating the angular speed of rotation of the rotatable member, manipulating the level of the bulk particulate material in the vessel, or two or more of these methods.

7. A method as claimed in any one of the preceding claims, in which the axis of rotation of the rotatable member is substantially vertical, and in which the rotatable member causes movement of the material particles essentially inwardly towards the axis of rotation.

8. A method as claimed in any one of the preceding claims, in which the rotatable member is rotated at an angular speed of between 100rpm and 3500rpm.

9. A method as claimed in claim 8, in which the rotatable member is rotated at an angular speed of between 500rpm and 1000rpm.

10. A method as claimed in claim 9, in which the rotatable member is rotated at an angular speed of between 700rpm and 800rpm.

11. A method as claimed in any one of the preceding claims, in which the bulk particulate material has a mean particle size of less than 1mm.

12. A method as claimed in claim 10, in which the bulk particulate material has a mean particle size of less than 0,1mm.

13. A method as claimed in any one of the preceding claims, in which the bulk particulate material is particulate silica having a particle size of less than 0,5 $\mu$ m.

14. A method as claimed in claim 13, in which the ratio of the density of the silica prior to densifying thereof, to the density of the densified silica is at least 2:3.

15. A method as claimed in claim 14, in which the ratio of the density of the silica prior to densifying thereof, to the density of the densified silica is at least 1:2.

16. Apparatus for densifying a bulk particulate material, the apparatus including

a vessel for at least partially confining a body of the bulk particulate material;

5 a rotatable member which is arranged such that in use it is submerged in the body of bulk particulate material and causes movement of the material particles essentially towards or away from an axis of rotation when the rotatable member is rotated about the axis of rotation; and

10 drive means connected to the rotatable member and capable of rotating the rotatable member when it is submerged in the body of bulk particulate material.

17. Apparatus as claimed in claim 16, in which the vessel has an outlet for densified bulk particulate material at a low elevation, and an inlet for bulk particulate material at a higher elevation than the outlet, the rotatable member  
15 being located at the elevation of between the inlet and the outlet of the vessel.

18. Apparatus as claimed in claim 16 or claim 17, in which the drive means is capable of rotating the rotatable member at an angular speed of between  
20 100rpm and 3500rpm when the rotatable member is submerged in the body of particulate material.

19. Apparatus as claimed in claim 18, in which the drive means is capable of rotating the rotatable member at an angular speed of between 500rpm and  
25 1000rpm when the rotatable member is submerged in the body of particulate material.

20. Apparatus as claimed in any one of claims 16 to 19 inclusive, in which the rotatable member includes a plurality of circumferentially spaced vanes directed  
30 or arranged so that the movement of the material particles is essentially inwardly towards the axis of rotation when the rotatable member is rotated.

21. Apparatus as claimed in claim 20, in which the vanes project from an upper surface of a disk-shaped body.

22. Apparatus as claimed in claim 20 or claim 21, in which the vanes are planar and are substantially tangential to a drive shaft connecting the drive means to the rotatable member.

23. Apparatus as claimed in any one of claims 20 to 22 inclusive, in which a radially inner end portion of each vane is truncated so that the radially inner end of the vane forms an angle of between  $15^\circ$  and  $60^\circ$  with the axis of rotation in the plane of the vane.

24. Apparatus as claimed in any one of claims 16 to 23 inclusive, in which the vessel has a wall defining a circular cylindrical interior surface, and in which the vessel has a central, longitudinal axis which is coaxial with the axis of rotation of the rotatable member, the ratio of the diameter of a circle described by the rotatable member when it rotates, to the diameter of the vessel being between 0,25:1 and 0,99:1.

25. Apparatus as claimed in claim 24, in which the ratio of the diameter of the circle described by the rotatable member when it rotates, to the diameter of the vessel is between 0,9:1 and 0,99:1.

26. Apparatus as claimed in any one of claims 16 to 25 inclusive, in which the vessel has a volume of between  $0,1\text{m}^3$  and  $200\text{m}^3$ .

27. Apparatus as claimed in claim 26, in which the vessel has a volume of between  $0,1\text{m}^3$  and  $0,5\text{m}^3$ .

28. Apparatus as claimed in any one of claims 16 to 27 inclusive, in which the axis of rotation of the rotatable member is substantially vertical.

29. Apparatus as claimed in any one of claims 16 to 28 inclusive, which includes conveying means and bagging means, the conveying means being arranged to convey densified bulk particulate material from the vessel to the bagging means for bagging the densified bulk particulate material.

5

30. Apparatus as claimed in any one of claims 16 to 29 inclusive, which includes vibration means for vibrating the vessel to inhibit agglomeration or caking or build-up of the particulate material against interior surfaces of the vessel.

10

31. A method of densifying a bulk particulate material as claimed in claim 1, substantially as herein described and illustrated.

15

32. Apparatus for densifying a bulk particulate material as claimed in claim 16, substantially as herein described and illustrated.

33. A new method, or new apparatus, substantially as herein described.

1/4

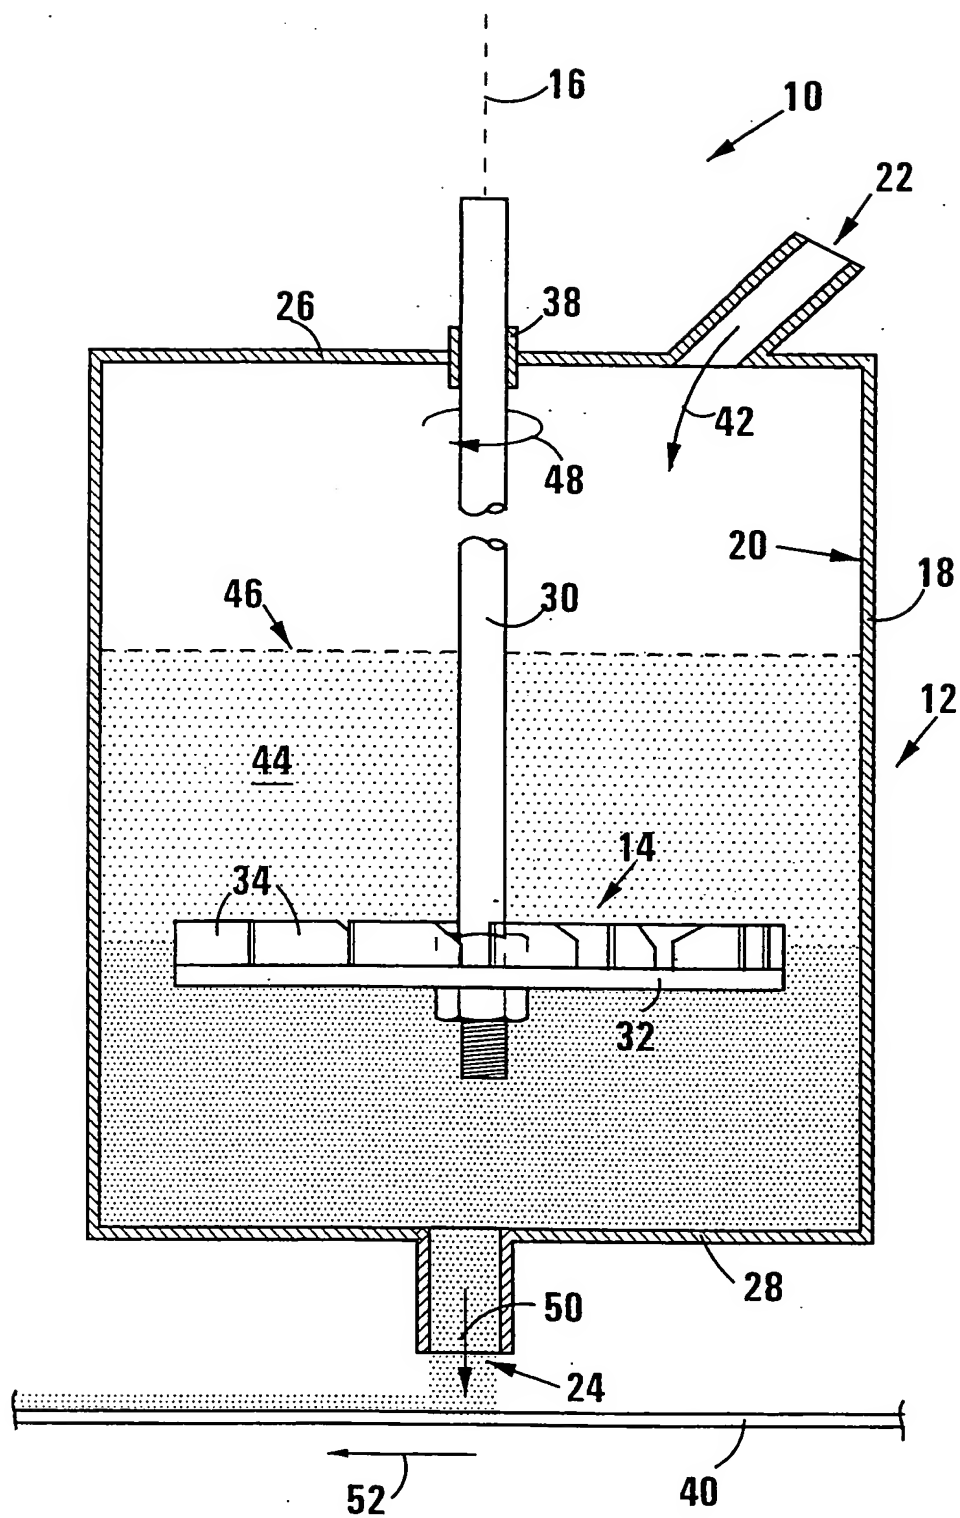


FIG 1


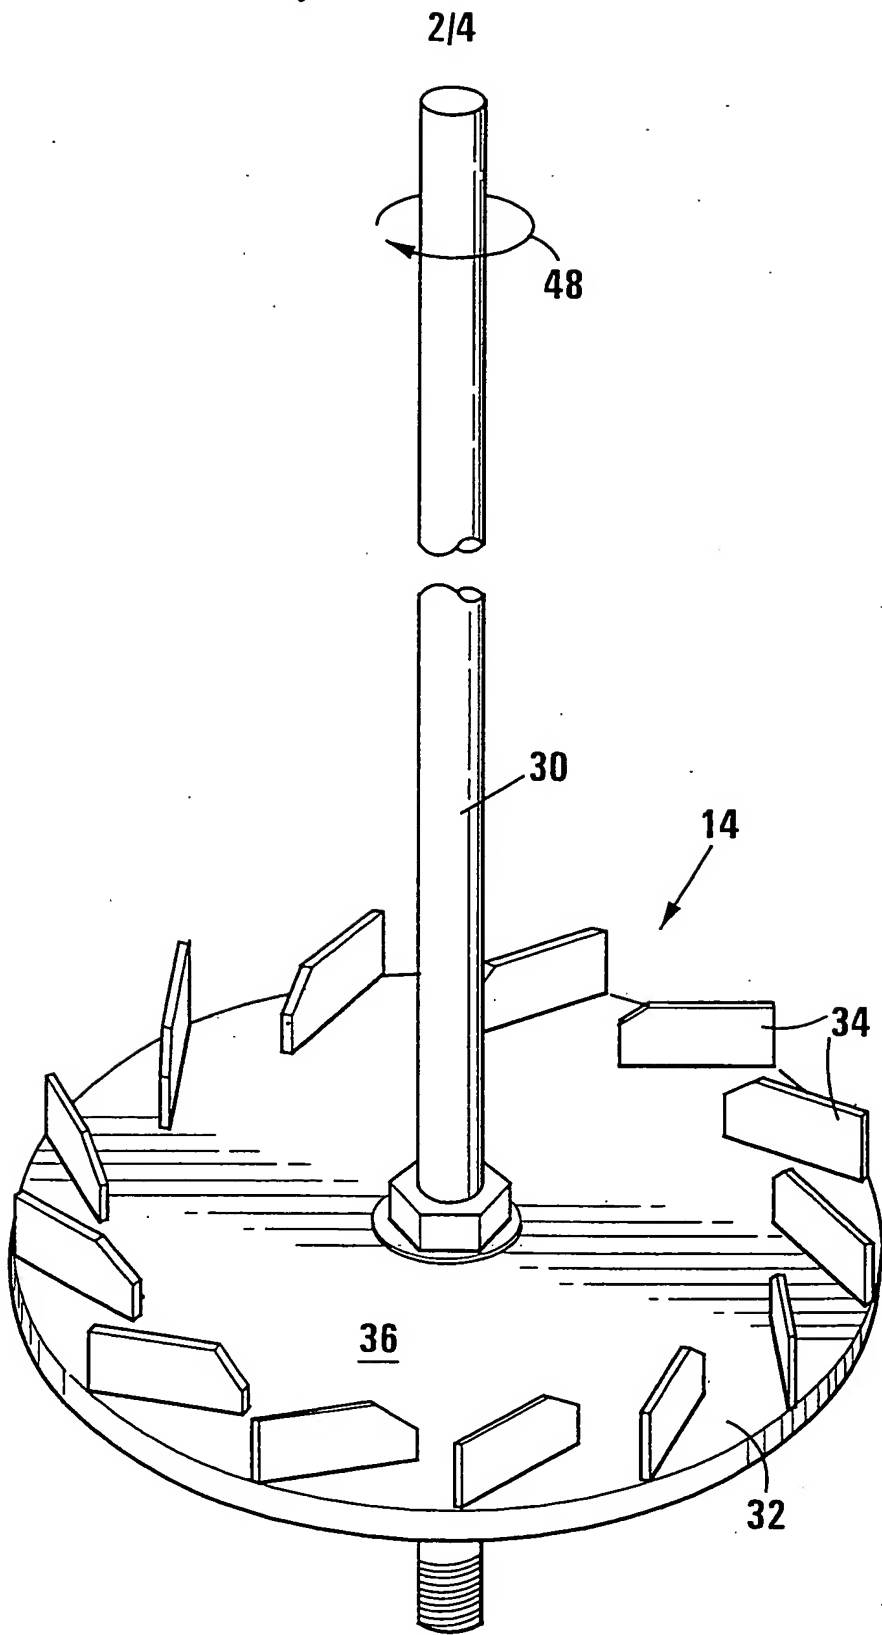


FIG 2

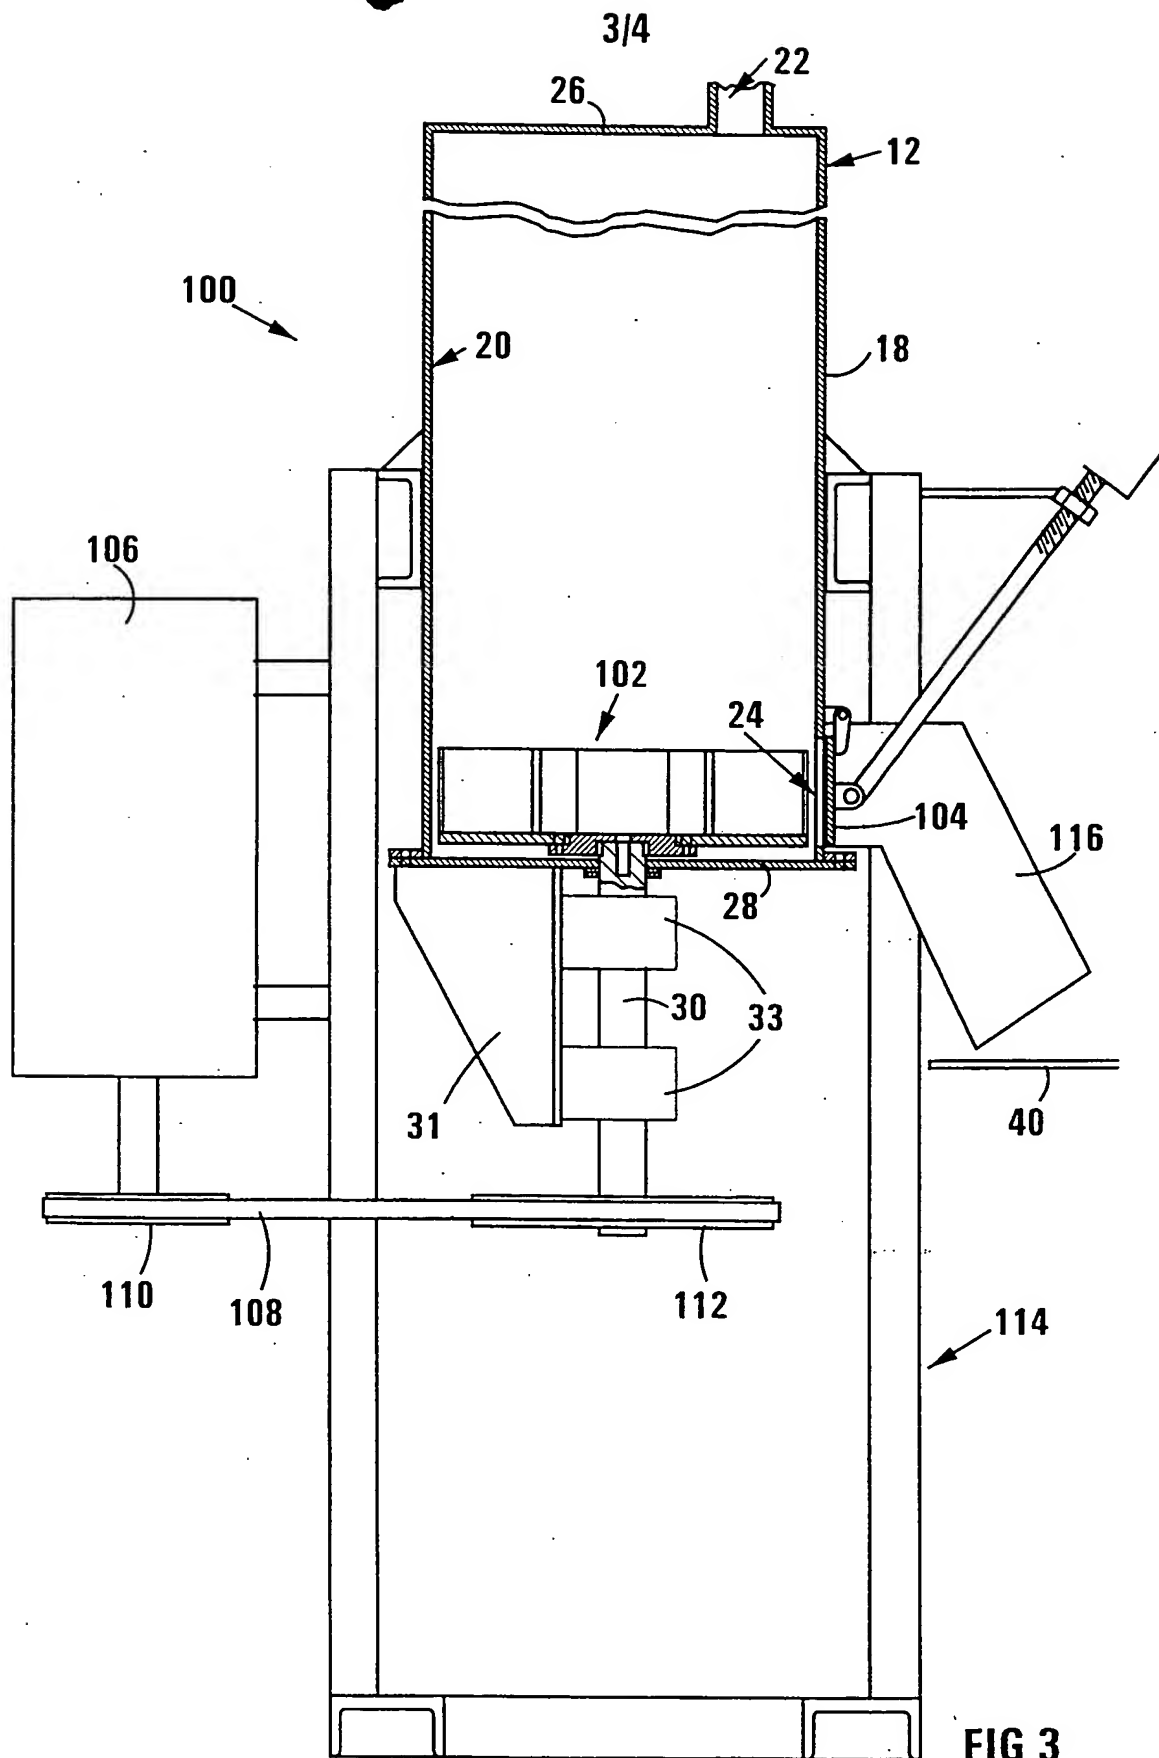

4/4

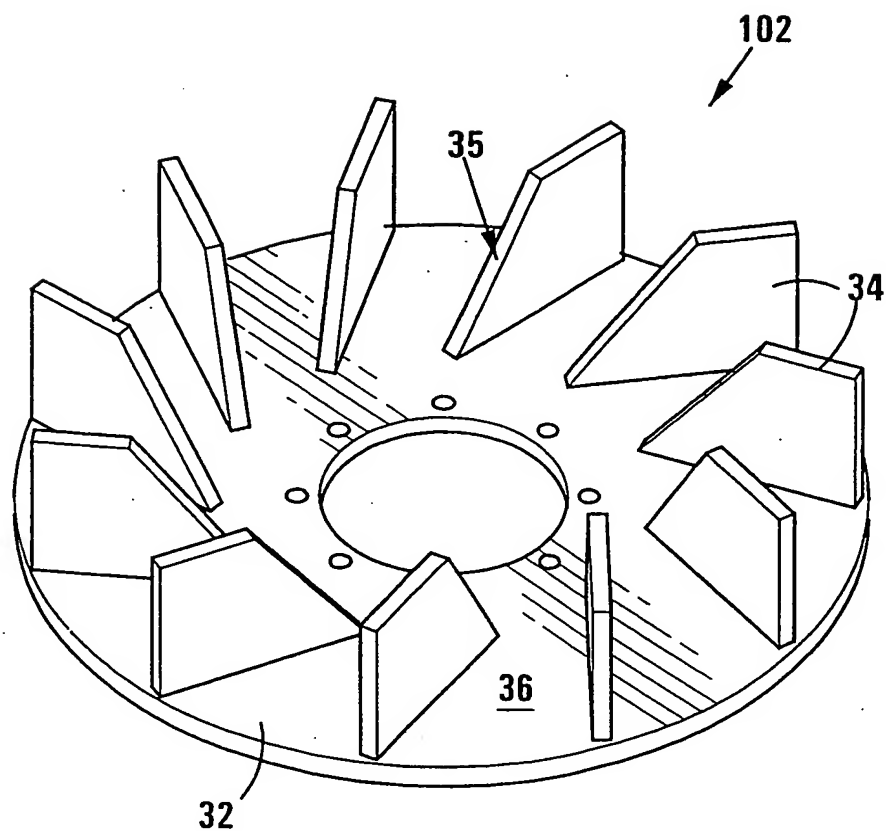


FIG 4

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/IB 99/0099

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 B65G69/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B65G B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 1 814 171 A (MARSH) 14 July 1931 (1931-07-14) the whole document ---	1,16
A	CH 513 033 A (MAAG) 30 September 1971 (1971-09-30) column 2, line 11 -column 4, line 43; figures -----	1,16

☐ Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

9 November 1999

Date of mailing of the international search report

17.11.99

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Newell, P

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 99/01199

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☒ Claims Nos.: 31-33  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:  
Rule 6.2 (a) PCT
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
  
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims: it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/IB 99/1199

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 1814171 A	14-07-1931	NONE	
CH 513033 A	30-09-1971	AT 301499 B	15-08-1972
		NL 6811468 A	14-02-1969
		SE 359453 B	03-09-1973

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKewed/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**